


ALLFACE INSULATOR F1 AND F1+


Available for F1 and F1+ brackets with a throat depth of 35 - 255mm.
Always use insulators in combination with thermal insulation.

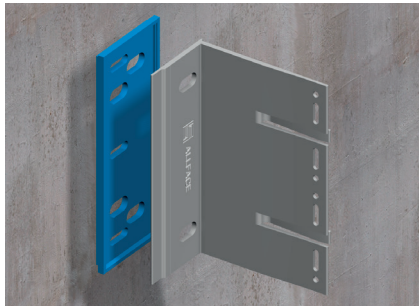

property	value
thermal conductivity	0,22 - 0,23 W/mK
density	0,9 g/cm ³
breaking strength	38 MPa
elongation at break	100 %

I.F1.CAM

pre-assembled insulator,
suitable for bracket F1.D11,
F1.D6,5, F1.D6,5X2,
dimensions: 71,2 x 97 x 5mm,
material: PP




I+F1.CAM

pre-assembled insulator,
suitable for bracket F1+D11,
F1+D6,5, F1+D6,5X3,
dimensions: 71,2 x 182 x 5mm,
material: PP



I.F1.CAM AND I+F1.CAM

stackable insulators,
to improve U-value
and to compensate
bumpy wall tolerances

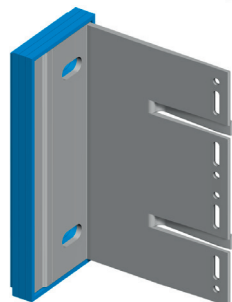

I.F1.CNM

single insulator,
suitable for bracket F1.D11,
F1.D6,5, F1.D6,5X2,
dimensions: 71,2 x 97 x 5mm,
material: PP



I+F1.CNM

single insulator,
suitable for bracket F1+D11,
F1+D6,5, F1+D6,5X3,
dimensions: 71,2 x 182 x 5mm,
material: PP



I.F1.CNM AND I+F1.CNM

stackable insulators,
for self-installation



ALLFACE Befestigungstechnologie GmbH
A-2544 Leobersdorf, Ared Straße 29, Büro 222

T +43 (0)2256 62518

F +43 (0)2256 62518 18

E office@allface.com

www.allface.com